



Discharge characteristics 77°F(25°C)

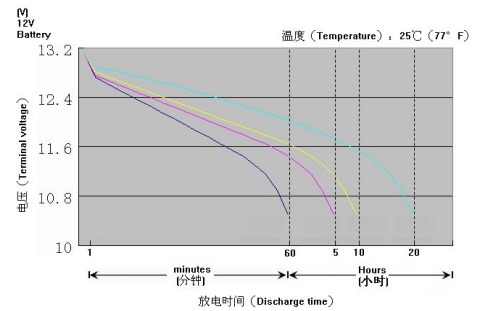

Duration of discharge VS discharge current

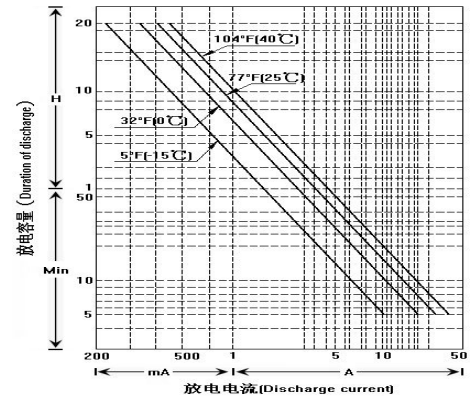

Specifications:	
Model:	ES1213
Nominal Voltage	12V
Rated Capacity	
20 Hour Rate (0.065A to 10.5V)	1.3Ah
Hourly rate conversion capacity	
1 Hour Rate (1.3A to 10.5V)	0.8Ah
5 Hour Rate (0.26A to 10.5V)	1.1Ah
10 Hour Rate (0.13A to 10.5V)	1.2Ah
20 Hour Rate (0.065A to 10.5V)	1.3Ah
Dimension and Weight	
Length	97±2mm
Width	43±2mm
Height	52±2mm
Total Height	58±2mm
Weight	0.6Kg
Shell	ABS
Self discharge Rate (20°C)	≥85%/3month
Internal Resistance	Fully charged Battery ≤10mΩ
Operating Temperature Ronger	
Discharge	-35°C(-31°F)~50°C(122°F)
Charge	-15°C(5°F)~40°C(104°F)
Storge	-15°C(5°F)~40°C(104°F)
Charging Methods	
Floating Use	13.5V~13.8V(25°C), Compensation co-efficient-3mv/cell/°C
Cycling Use	14.7V~14.9V(25°C), Compensation co-efficient-5mv/cell/°C
Max Charge Current	0.15C2(A)
Applications	Electric vehicle, solar power, wind power, telecom systems, UPS, Medical