

# PLI12-200BT-SLIM Product Data Sheet

Issue Date: 27/05/2025

Issued By: R&J Batteries PTY LTD

**Predator**  
+ - **LiTHIUM BATTERIES**


## Technical Information

The Predator PLI12-200BT-SLIM LiFePO<sub>4</sub> battery is a 12V deep cycle battery with a capacity of 200 Amp Hours (Ah). It is suited for deep cycle applications where high cycle life and low weight is required. The ultra-slim case design allows this battery to be installed in locations with limited space.

The integrated Battery Management System (BMS) ensures that Predator LiFePO<sub>4</sub> batteries are safe and stable. The battery can be monitored using the existing Predator Bluetooth App, and communication with Victron devices is possible via CANBus (cable included).

## Features and Benefits

- Greater usable capacity compared to lead acid batteries
- Over 3500 cycles at 80% Depth of Discharge
- Fast recharge
- Slim & lightweight
- IP30 Rated – internal installation only

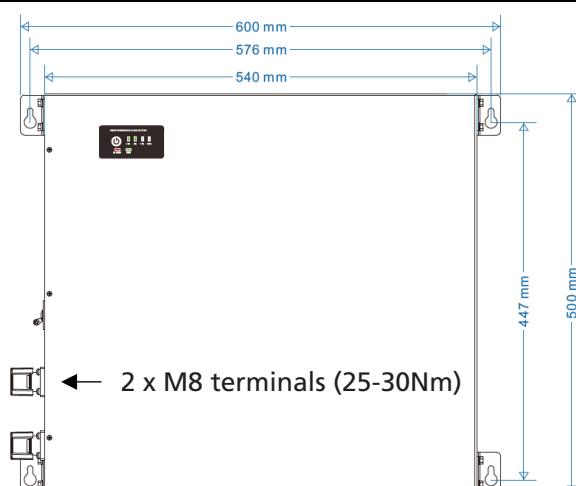

## Applications

- Recreation, Sport & Leisure
- Caravans & Campers
- Limited space locations

Item	Characteristic		Specification
1.1	Nominal Capacity		200Ah
1.2	Nominal Energy		2560Wh
1.3	Nominal Voltage		12.8V
1.4	Charging Voltage		14.4 ±0.2V
1.5	Float Charge Voltage (for stand-by use)		13.6V
1.6	Maximum charge current		150A
1.7	Recommended charge current		≤ 100A
1.8	Maximum discharge current		150A Constant
1.9	Discharge cut-off voltage		11.2V
1.10	Dimensions (L x W x H), ±2mm		600mm x 500mm x 70mm
1.11	Nominal Weight		25kg
1.12	Bluetooth Connectivity		Yes, via App (search Predator Bluetooth)
1.13	Operation Temperature	Charge	0°C to +50°C (0-95% RH)
		Discharge	-20°C to +55°C (0-95% RH)
1.14	Self-discharge	Residual Capacity	≤ 3% /month, ≤ 15% /year
		Recover Capacity	≤ 1.5% /month, ≤ 8% /year
1.15	Storage Environment	≤ 1 month	-20°C to +60°C, 5% to 75% RH
		≤ 3 months	-10°C to +45°C, 5% to 75% RH
		Recommended	+15°C to +35°C, 5% to 75% RH
1.16	Parallel connection of up to 4 batteries is supported by the BMS. For series connection, up to 4 batteries can also be connected but CAUTION must be taken. Individual battery voltages must all be kept within a 0.2V range (a battery balancer is recommended). Combinations of parallel and series connection are not supported. Failure to comply may void warranty.		

## Product Safety

### 1. Storage & Transport

The battery must be charged using the Standard Charge Process every 6 months if not in use.

Do not drop the battery.

Maximum stacking quantity (height) is 6 batteries.

The battery must be kept upright at all times.

### 2. Product Warnings

Please read and follow the handling instructions before use. Improper use may cause heat, fire, rupture, damage or capacity deterioration of the battery. The manufacturer is not responsible for any accidents caused by misuse or poor maintenance.

- Do not store or use battery near heat source.
- Do not install in vehicle engine bay.
- Do not expose battery to direct sunlight for extended periods.
- Do not connect battery to high voltage.
- Do not place battery in water or fire.
- Always check polarity before connecting the battery.
- Do not short circuit battery.
- Do not expose the battery to impact or crushing force.
- Do not disassemble the battery.
- Do not install or connect this battery with different battery types.
- Protect battery from high temperatures. High temperatures may result in fire or loss of battery function and service life.
- Do not allow the battery to remain discharged. Re-charge battery when discharged.
- Use the correct battery charger for this battery.
- If battery emits an unusual odor, becomes hot or the case has distorted, stop using the battery immediately
- If eyes or skin are exposed to liquid leaking from the battery, rinse it with clean water and seek medical advice immediately.